

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 321 757 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.06.2003 Bulletin 2003/26

(51) Int Cl.7: G01N 1/36, G01N 1/30

(21) Application number: 02028076.4

(22) Date of filing: 17.12.2002

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SI SK TR
Designated Extension States:
AL LT LV MK RO

- Reinhardt, Kurt
Tucson, Arizona 85710 (US)
- Holubec, Miroslav
Tucson, Arizona 85718 (US)
- Bryant, David
Tucson, Arizona 85737 (US)

(30) Priority: 20.12.2001 US 29658

(71) Applicant: VENTANA MEDICAL SYSTEMS, INC.
Tucson, AZ 85737 (US)

(74) Representative:
Sulzbach, Werner, Dipl.-Chem. Dr.
Prinz & Partner GbR
Manzingerweg 7
81241 München (DE)


(72) Inventors:
• Taft, Scott
Oro Valley, Arizona 85737 (US)

(54) Method and apparatus for preparing tissue samples for sectioning

(57) The present invention provides a more efficient and faster way to prepare tissue samples for sectioning. More particularly, in accordance with the present invention, a tissue sample 22 is embedded in a porous em-

bedding media 28 in a desired orientation, processed, and sectioned all while being held in the porous embedding media. The post-tissue processing step of manual embedding in paraffin is eliminated from the process.

FIG. 1

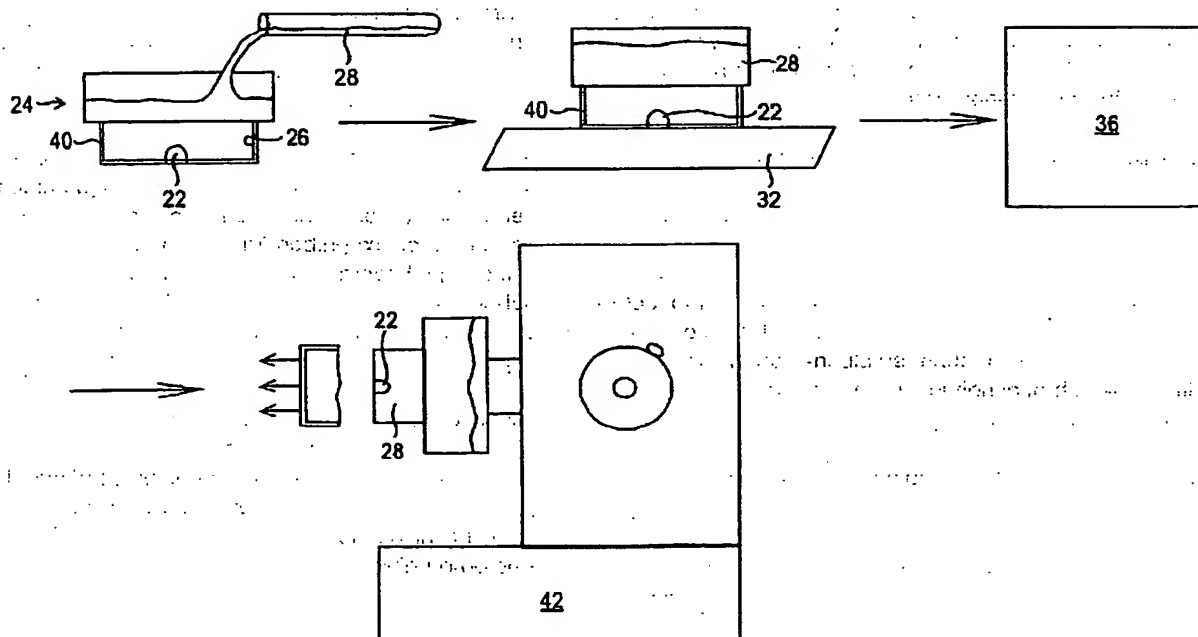

EP 1 321 757 A2

Description

[0001] The present invention relates to preparation of tissue samples for histological examination. The invention has particular utility in preparing tissue samples for microtome sectioning prior to microscopic examination, and will be described in connection with such utility, although other utilities are contemplated.

[0002] Conventionally, tissue specimens are prepared for microtome sectioning in two sequential stages. In the first stage the tissue specimen is preserved by chemical fixation and the impregnation of paraffin. The specimen is typically held in a cassette to maintain control and segregate it from other samples. The specimen is placed in a fixation solution, typically neutral buffered formalin, to preserve the chemical structure of the tissue. The specimen is then subjected to a series of solvents, typically alcohols and xylene followed by molten paraffin. The solvents remove the water content of the tissue, and provide a bridge to allow the molten paraffin to penetrate the sample and structurally support it. At the end of the first stage the tissue specimen is loose in the cassette, chemically fixed and impregnated with paraffin. In the second stage the tissue specimen is oriented and embedded in a paraffin block in preparation for sectioning. The specimen is placed and oriented in the bottom of a mold and molten paraffin is poured over the specimen. A jig or fixture for attachment to the microtome is placed in the top of the mold and additional molten paraffin is poured to embed this fixture to the paraffin block. The paraffin block is allowed to cool and solidify. The paraffin block is then removed from the mold, exposing the tissue specimen, and then mounted in the clamp of a microtome for sectioning of the specimen.

[0003] It is important that the specimen is accurately positioned in the embedding mold prior to the paraffin embedding step, so that sectioning of the specimen occurs along appropriate planes to reveal the desired cell structure. Presently, accurate positioning of the specimen is achieved by setting the specimen in a desired position in the embedding mold, and allowing a few drops of molten paraffin wax to fall on the specimen to set the specimen in the desired position. Alternatively, a few drops of molten paraffin wax are placed in the bottom of the embedding mold, and the specimen is set in desired position in the still molten paraffin wax. The molten paraffin wax is allowed to cool and solidify. The solidified paraffin wax holds the specimen in the required position through the second stage, after which more molten paraffin wax is added to the cassette or mold to fully embed the specimen. In place of paraffin wax, molten nitrocellulose, gelatin, and various resins have been used to embed the specimen in a desired orientation through the first stage.

[0004] Various attempts to improve the preparation of tissue samples for sectioning primarily have involved modifications to the molds or cassettes. See, for exam-

ple, U.S. Patent Nos. 3,982,862; 4,557,903; 4,801,553; 5,080,869; and 6,017,476, which are exemplary.

[0005] The present invention provides a more efficient and faster way to prepare tissue samples for sectioning. More particularly, in accordance with the present invention, a tissue sample is embedded in a porous embedding media in a desired orientation, processed, and sectioned all while being held in the porous embedding media. The post-tissue processing step of manual embedding in paraffin is eliminated from the process.

[0006] Various features and advantages of the present invention will be seen from the following detailed description, taken in conjunction with the following drawings, wherein like numerals depict like parts, and wherein:

Fig. 1 is a diagrammatic flow chart showing a first method for orienting and processing a tissue sample in accordance with the present invention;

Figs. 2-4 are views similar to Fig. 1, showing second and third method for orienting and processing a tissue sample in accordance with the present invention;

Fig. 5 is a side elevational view, in section, of an embedding cassette in accordance with another preferred embodiment of the present invention;

Fig. 6 is a top plan view of the embedding cassette of Fig. 5;

Fig. 7 is a bottom view of the embedding cassette of Fig. 5;

Fig. 8 is a view, similar to Fig. 5, of the embedding cassette of Fig. 5 after embedding and processing, with the bottom portion of the cassette removed, and ready for sectioning.

[0007] Figure 1 is a diagrammatic flow chart showing a first method for orienting and processing a tissue sample for sectioning in accordance with the present invention. The technician obtains a tissue sample 22 from the examining doctor, nurse, or specialist. The technician typically will be given instructions as to how the tissue sample should be oriented for sectioning on a microtome or other cutting device. The technician orients the tissue sample 22 in a modified cassette-mold combination 24, which is lined with a filter paper 26, or the like. The technician then embeds the tissue sample 22 in the cassette 24 by filling the cassette with molten porous embedding media 28. The porous embedding media should be a material which is normally solid at room temperature and at tissue processing temperatures, and should have a melting point or liquidus point which is below the temperature at which the tissue sample would become denatured or otherwise changed by heat. The porous embedding media also is a material that is porous to treating solutions commonly used in processing and fixing tissues, e.g. acetic acid, acetone, chromic or picric acid, alcohols, aldehydes, mercuric chloride, osmium tetroxide, potassium dichloride, xylene, etc. Ap-

plicant has found that low melting point agarose, i.e. agarose having a melting point in the range of about 55 to 65°C, works particularly well as a porous embedding media. Currently preferred is Histogel™ brand of hydroxyethyl agarose available from Wayne Holland.

[0008] The technician fills the cassette/mold combination 24 with molten porous embedding media 28 until the specimen is completely covered. Generally, but not necessarily, the porous embedding media is added to fill the cassette/mold combination to the top. The cassette/mold combination containing the tissue sample and the liquid embedding media may be cooled on a cold plate 32 to solidify the porous embedding media, or simply left to cool to room temperature.

[0009] The cassette/mold combination containing the embedded tissue sample is then placed in a tissue processor 36 for conventional fixing and processing. The cassette/mold combination must be oriented in the tissue processor as shown in Figure 1, with the tissue sample and filter paper on the bottom.

[0010] During conventional automated processing the tissue sample as well as the porous embedding media are infiltrated with paraffin then allowed to cool to room temperature. This forms the paraffin block that contains the tissue oriented in the position the technician originally positioned it in.

[0011] After the tissue sample is processed, the bottom of the cassette 40 is removed, and the filter paper stripped from the paraffin block, exposing the embedded tissue. The cassette/mold combination then is coupled to a microtome 42 for tissue sectioning.

[0012] A feature and advantage of the present invention that results from using a porous embedding media during fixing and pre-processing, is that the post-processing paraffin wax embedding step is eliminated. In other words, one step in the process is eliminated, along with the technician time, equipment, material, energy and environmental costs associated with the paraffin wax embedding step. Moreover, tissue orientation is assured through the entire process, which is extremely critical for small biopsy examination.

[0013] Referring to Fig. 2, there is illustrated a second method of orienting and processing a tissue sample for sectioning in accordance with the present invention. The technician obtains a tissue sample 122 from the examining doctor, nurse or specialist. The technician typically will be given instructions as to how the tissue sample should be oriented for sectioning on a microtome or other cutting device. The technician orients the tissue sample 122 on the bottom of a two-piece processing cassette 124 which includes a removable metal bottom dish 126. The technician then embeds the tissue sample 122 in the cassette 124 by filling the cassette with molten porous embedding media 128. As before, the porous embedding media should be a material which is normally solid at room temperature and at tissue processing temperatures, and should have a melting point or liquidus point below the temperature at which the tissue sam-

ple would become denatured or otherwise changed by heat. The porous embedding media also should be a material that is porous to treating solutions commonly used in fixing and dehydrating tissues. As before, agarose has been found to be a particularly preferred porous embedding media.

[0014] The technician fills the cassette/mold combination 124 with molten porous embedding media 128 until the specimen is completely covered. The cassette containing the tissue sample and liquid porous embedding media may be cooled on a cold plate 132 to solidify the porous embedding media. Thereafter, the plastic or metal bottom dish 126 is separated from the remainder of the cassette to expose the embedded tissue sample, which is then passed to a tissue processor 136 for conventional fixing and processing. After the tissue sample is processed, the cassette then is coupled to a microtome 142 for tissue sectioning.

[0015] As before, by using a porous embedding media pre-processing and fixing, the post-processing paraffin wax embedding step is eliminated.

[0016] Fig. 3 shows yet another method of orienting and processing a tissue sample for sectioning in accordance with the present invention. Fig. 3 is similar to Fig. 1, in which, however, in place of porous embedding media 28, a pre-formed porous embedding block 129 is employed. The embedding block 129 preferably comprises a phenolic foam which is commercially available as a floral mounting block. A phenolic foam is preferred since it is inert and resistant to the liquids typically employed in tissue fixing and processing, yet is porous to the liquids, widely available, low cost, and easy to cut and shape. The pre-formed embedding block 129 is cut or shaped to fit into the bottom of the cassette/mold combination 24 which is lined with filter paper 26 or the like. However, prior to placing the pre-formed embedding block 129 into the cassette/mold combination, the technician forms a hole or depression 127 in the block 129, e.g. by cutting, drilling or punching a blind hole or slot, for accommodating the tissue sample in the desired orientation. The tissue sample 122 is placed in the hole 127. Porous embedding media 28 may be placed in the hole 127 and allowed to solidify to maintain the orientation of the tissue sample 122. The pre-formed embedding block 129 carrying the tissue sample 122 in desired orientation is then placed in the cassette. The cassette containing the embedded tissue sample is then passed to a tissue processor 36 for conventional fixing and processing, as before, prior to sectioning.

[0017] Alternatively, as shown in Fig. 4, the embedding block carrying the tissue sample may be placed in a cassette and passed directly to a tissue processor for conventional fixing and processing. After the tissue sample is processed, the sample and pre-formed embedding block may then be infiltrated and embedded in molten embedding media which may be a conventional paraffin wax, agarose, nitrocellulose, gelatin, or a resin, and the molten embedding media solidified by cooling,

and the embedded sample then sectioned, as before.

[0018] While the embodiment of Fig. 4 doesn't have the advantages of the Figs. 1-3 embodiments of eliminating the post-processing embedding step, the use of a pre-formed porous foam embedding media has advantages in that less paraffin wax or other embedding media is used. Also, the pre-formed foam embedding media may be supplied at the tissue grossing lab so that the Pathologist or assistant could precisely position the tissue sample in a desired orientation, thus eliminating possible miscommunication with the technician.

[0019] Referring to Figs. 5-8, there is shown an improved cassette 48 for use in accordance with the present invention. It would be appreciated, however, that the cassette as described below, advantageously may be employed in connection with a conventional paraffin wax impregnation process.

[0020] Referring specifically to Fig. 5, the cassette 48 comprises a two-piece body including a top portion 50 and a bottom portion 52. Top portion 50 has a perforated bottom wall 52, a front wall 54, a back wall 56, and two side walls 58, 60. Preferably, the front wall 54 includes an angled extension wall 64, which provides a writing surface 64 on which a sample identification label may be affixed. If desired, barcode indicia may be affixed to the underside surface 66 of extension wall 64. Bottom portion 52 is snap or friction mounted to top portion 50, and comprises a perforated bottom wall 78 and a bridging side wall 70 which spaces the bottom wall 78 from the top portion 50, and serves to contain molten porous embedding media. Bridging side wall 70 includes a pair of tear lines or lines of weakness 72 and a pull tab 74. The cassette including the top and bottom portions 50, 52 are made of a suitable plastic material compatible with the intended processing and fixing.

[0021] Use of the cassette 48 above described will now be discussed. Again referring to Fig. 5, the technician obtains a tissue sample 76 from the examining doctor, nurse, or specialist. The technician will typically be given instructions as to how the tissue sample should be oriented for sectioning on a microtome or other cutting device. The technician obtains a pre-formed embedding block 78, and forms an opening in the block 78 for the tissue sample, e.g. by cutting, drilling or punching a blind hole or slot. As before, the embedding block 78 preferably comprises a phenolic foam such as a floral mounting block. As mentioned supra, a phenolic foam mounting block is preferred since it is inert and resistant to the liquids typically employed in tissue processing and fixing, porous, widely available, low cost and easy to cut and shape. The embedding block 78 is cut or shaped to fill, at least in part, the bottom portion 52 of cassette 48. The embedding block with the tissue sample mounted therein is placed into the bottom portion 52 of cassette 48 with the tissue facing the outside of the cassette. The top portion 50 is then snapped or fitted to the bottom portion 52.

[0022] The tissue sample may be automatically proc-

essed to remove water and fix the tissue sample, etc. using known processing techniques, the last step being the paraffin infiltration step where the tissue sample and porous embedding media are infiltrated with paraffin and allowed to solidify. Bridging side wall 70 is then peeled off the cassette along the line of weakness 72, and the bottom wall 68 removed to expose the embedded tissue sample in the foam block (Fig. 8). The sample may then be sectioned on a microtome.

[0023] Various changes may be made in the invention. For example, a tissue sample may be oriented in a pre-formed embedding block and then processed in a conventional cassette. Also, the two-part cassette with a removable bridging side wall of Figs. 5-8 may be employed in a conventional two-stage fixing and embedding process.

[0024] It should be understood that, while the present invention has been described in detail herein, the invention can be embodied otherwise without departing from the principles thereof, and such other embodiments are meant to come within the scope of the present invention as defined in the following claim(s):

Claims

1. A cassette having a hollow for receiving and retaining a tissue specimen for fluid treatment preparatory to histological examination, **characterized by** comprising a top portion 50 and a bottom portion snap 52 or friction mounted to the top portion, the bottom portion having a side wall 70 removable along a tear line 72.
2. The cassette of claim 1, **characterized by** one or more of the following features:
 - (a) wherein said removable side wall 70 bridges said top and bottom portions;
 - (b) wherein said removable side wall 70 includes a pair of tear lines 72;
 - (c) wherein said removable side wall 70 includes a projecting tab 74 to facilitate removal of said wall; and
 - (d) wherein said top and bottom portions 50, 52 are molded of a synthetic plastic material.
3. The cassette of claim 1 or 2, further comprising one or more of the following features:
 - (a) a pre-formed foam block 78 in said hollow;
 - (b) agarose in said hollow;
 - (c) both agarose and pre-formed foam block 78 in said hollow; and
 - (d) filter paper 26 positioned in said hollow to retard egress of molten paraffin.
4. A method for preparing a tissue sample for analysis,

characterized by the steps of:

- (a) orienting the tissue sample in the cassette of any of claims 1-3;
- (b) embedding an oriented tissue sample in a porous embedding media; and
- (c) directly processing the embedded tissue sample with tissue processing reagents while maintaining the original orientation of the sample without a post-processing paraffin-embedding step.

5. The method of claim 4, **characterized by one or more of the following features:**

- (a) wherein the porous embedding media comprises agarose;
- (b) wherein the process embedded media comprises a pre-formed foam;
- (c) wherein the tissue sample is oriented in an opening or depression formed in said pre-formed foam;
- (d) including the step of forming said opening or depression by cutting, drilling, punching or molding;
- (e) wherein the tissue sample is embedded flush with or below an outer surface of the pre-formed foam;
- (f) wherein the pre-formed foam comprises a preformed block of phenolic foam;
- (g) wherein said agarose has a melting point in the range of about 55 to 65°C;
- (h) further including the step of sectioning the embedded tissue sample following processing; and
- (i) wherein said tissue processing reagents are selected from the group consisting essentially of aqueous formalin, water, xylene, alcohol and paraffin.

6. A hollow cassette for receiving and retaining a tissue specimen for fluid treatment preparatory to histological examination, **characterized by** comprising a top portion 50 and a bottom portion 52 snap or friction mounted to the top portion, the bottom portion having a side wall 70 removable along a tear line 72, the hollow being filled, at least in part, by a porous embedding medium.

7. The cassette of claim 6; wherein said porous embedding medium comprises agarose and/or a pre-formed foam 78.

8. The cassette of claim 7, **characterized in that** the agarose has a melting point in the range of 55 to 65°C.

9. The cassette of claim 7, **characterized in that** the

foam 78 comprises a phenolic foam.

10. The cassette of any of claims 6-9, **characterized by one or more of the following features:**

- (a) wherein said removable side wall 70 bridges said top and bottom portions;
- (b) wherein said removable side wall 70 includes a pair of tear lines 72;
- (c) wherein said removable wall 70 includes a projecting tab 74 to facilitate removal of said wall;
- (d) wherein said top and bottom portions 50, 52 are molded of a synthetic plastic material; and
- (e) further comprising filter paper 26 positioned within the cassette to retard egress of molten paraffin.

FIG. 1

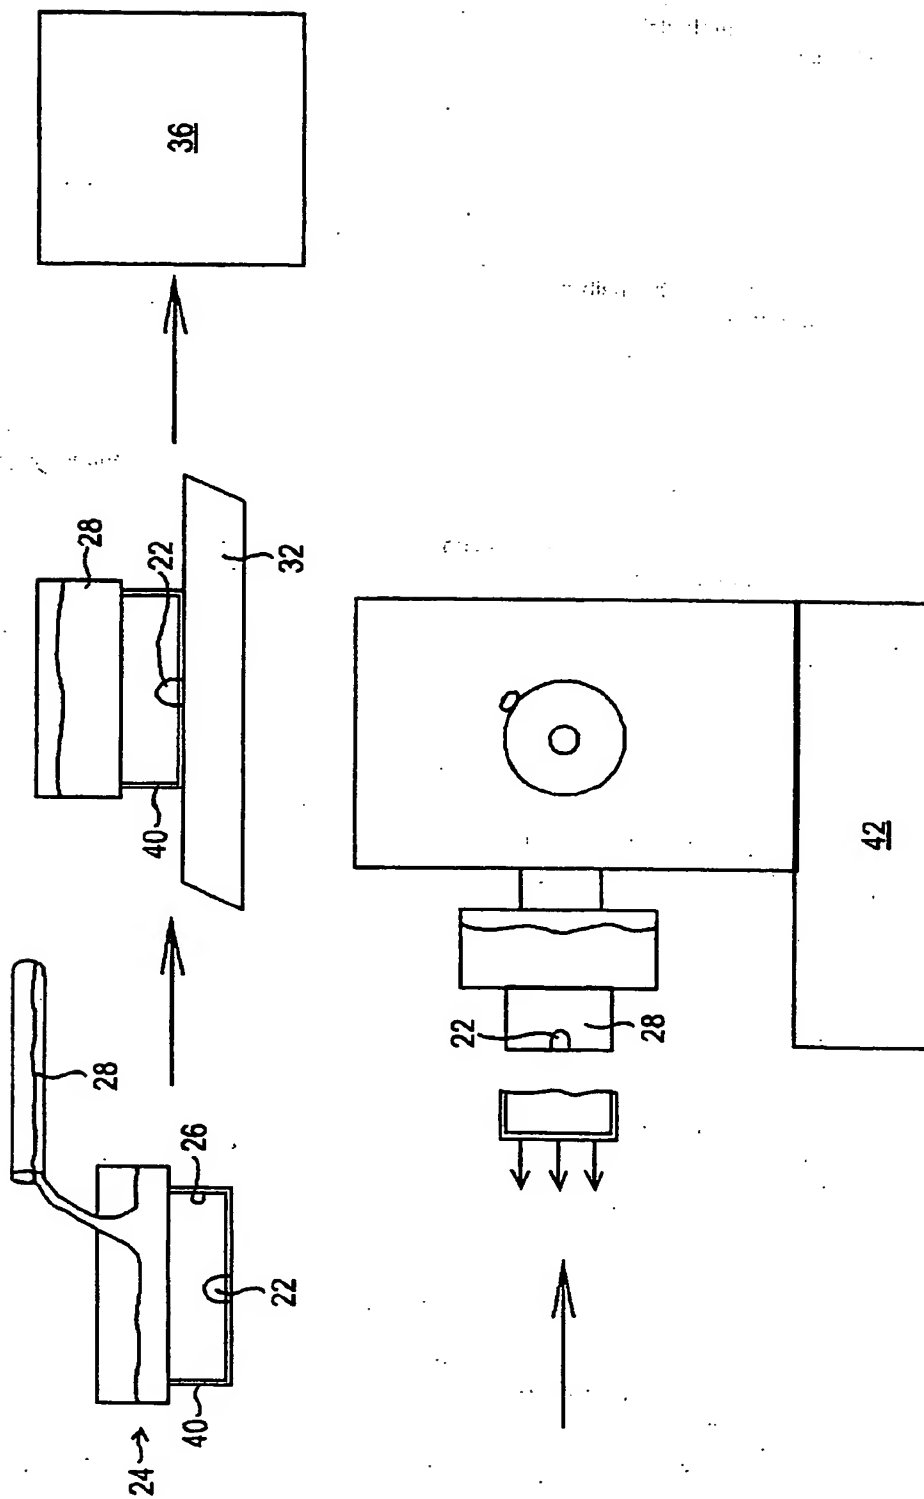


FIG. 2

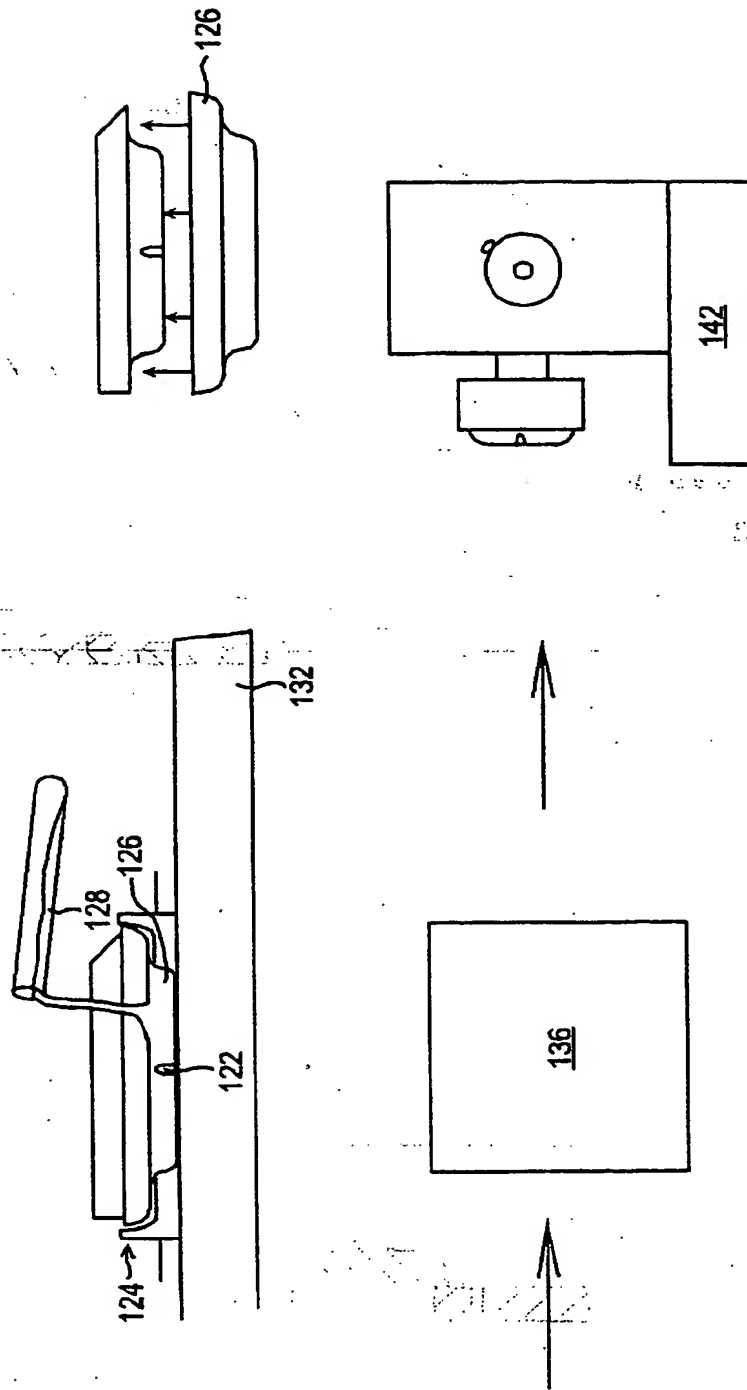


FIG. 3

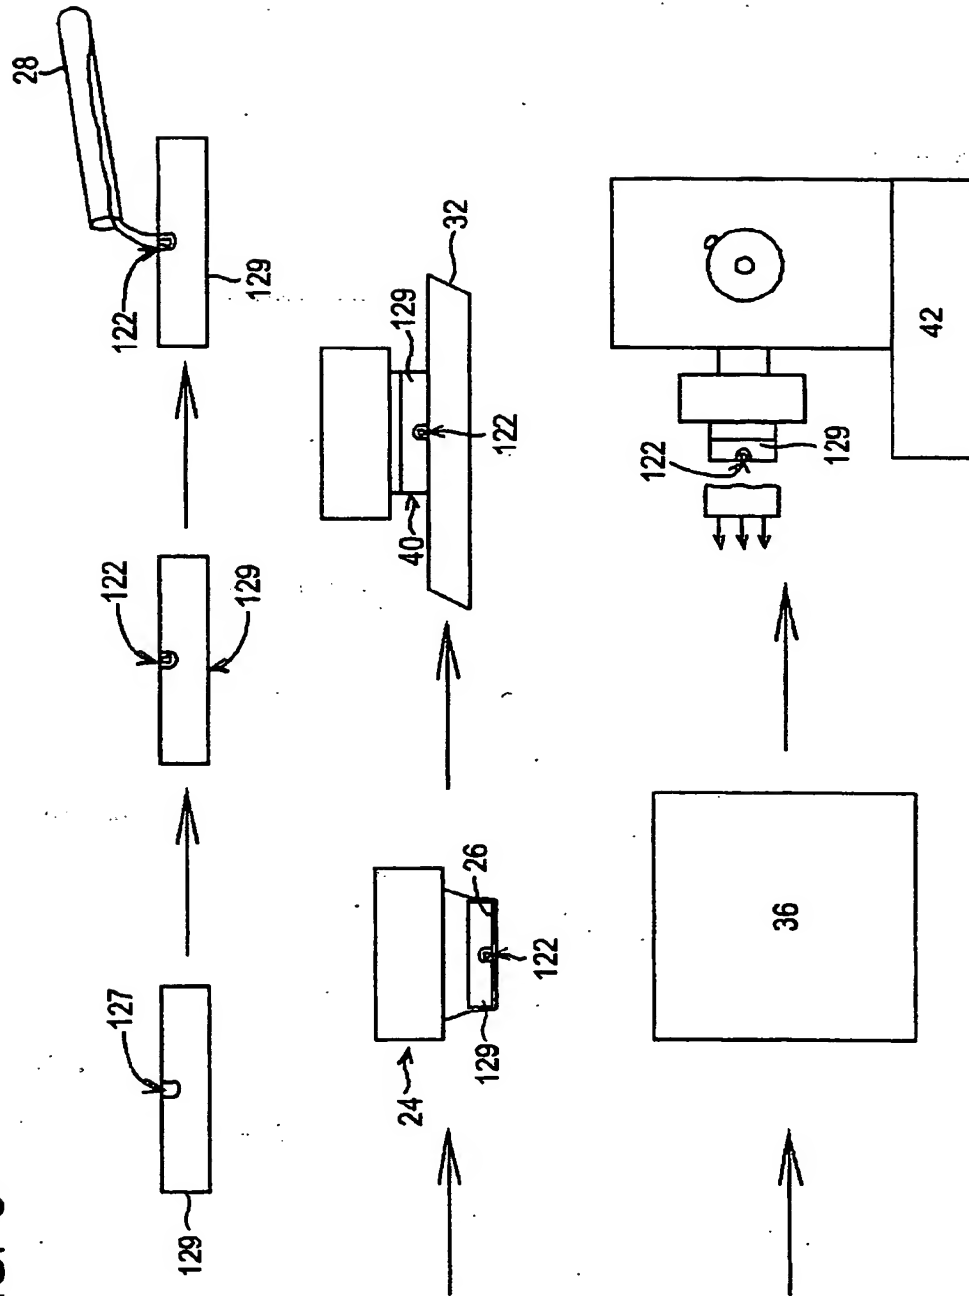


FIG. 4

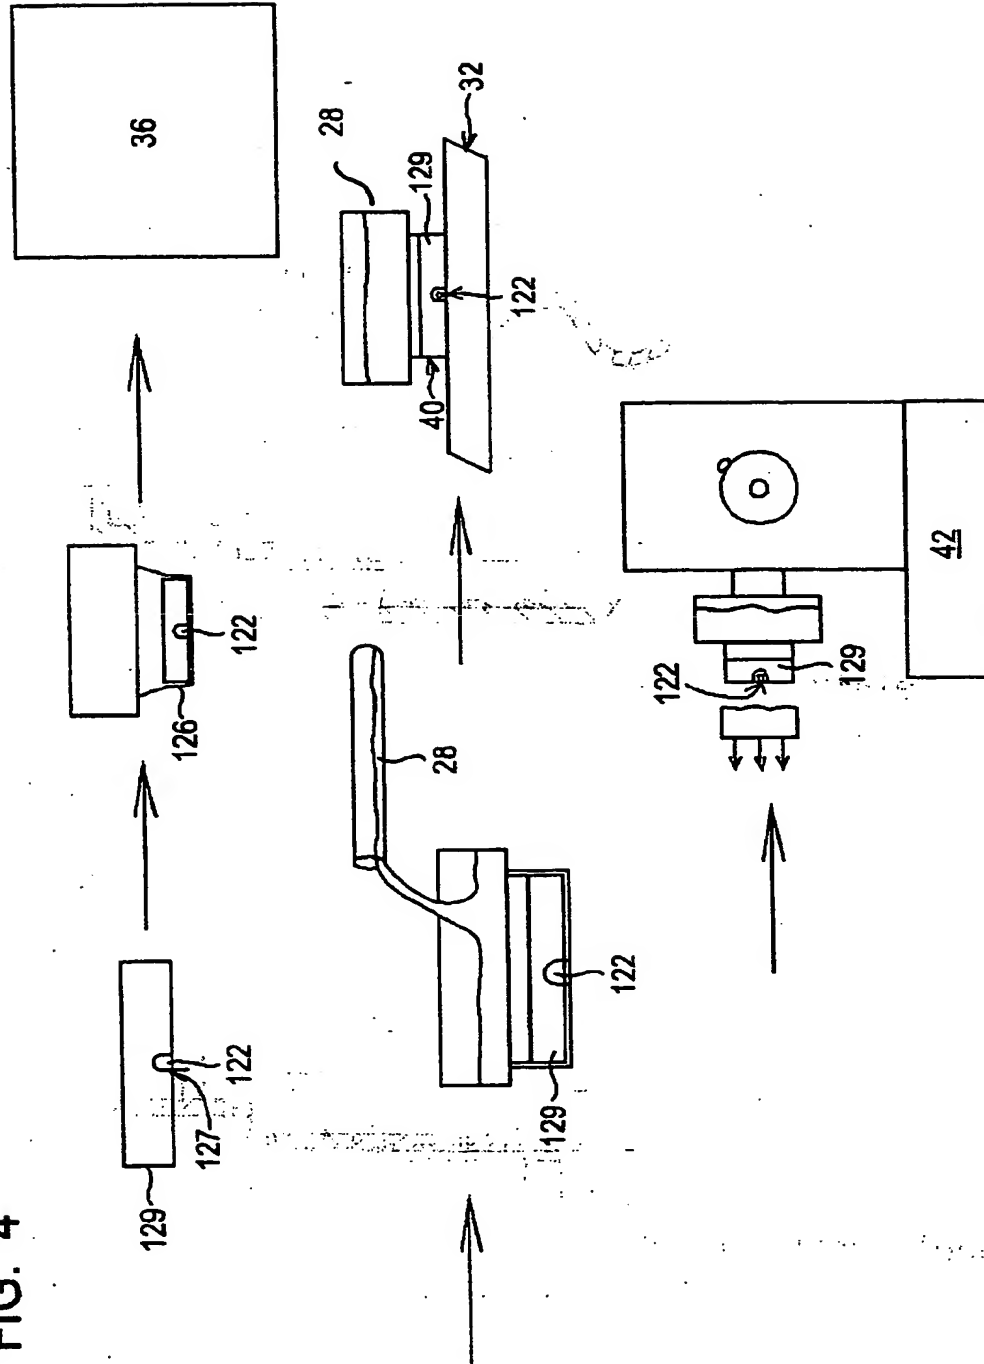


FIG. 6

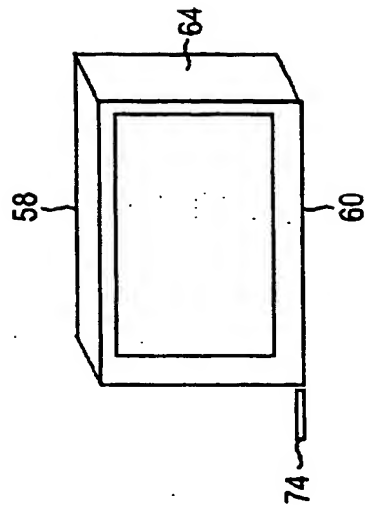


FIG. 8

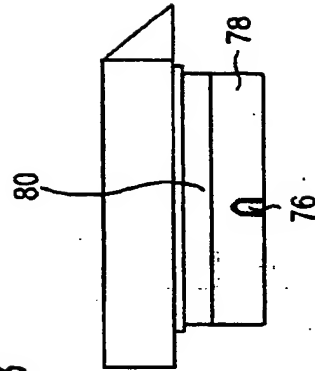


FIG. 5



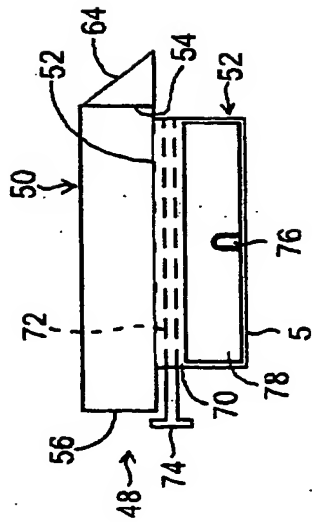


FIG. 7



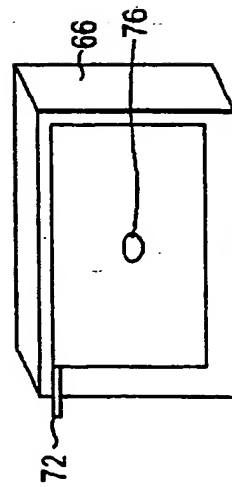

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 321 757 A3**

(12)



EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
02.06.2004 Bulletin 2004/23

(51) Int Cl.7: **G01N 1/36, G01N 1/30**

(43) Date of publication A2:
25.06.2003 Bulletin 2003/26

(21) Application number: **02028076.4**

(22) Date of filing: **17.12.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SI SK TR**
Designated Extension States:
AL LT LV MK RO

- Reinhardt, Kurt
Tucson, Arizona 85710 (US)
- Holubec, Miroslav
Tucson, Arizona 85718 (US)
- Bryant, David
Tucson, Arizona 85737 (US)

(30) Priority: **20.12.2001 US 29658**

(71) Applicant: **VENTANA MEDICAL SYSTEMS, INC.**
Tucson, AZ 85737 (US)

(74) Representative:
Sulzbach, Werner, Dipl.-Chem. Dr.
Prinz & Partner GbR
Manzingerweg 7
81241 München (DE)


(72) Inventors:
• Taft, Scott
Oro Valley, Arizona 85737 (US)

(54) Method and apparatus for preparing tissue samples for sectioning

(57) The present invention provides a more efficient and faster way to prepare tissue samples for sectioning. More particularly, in accordance with the present invention, a tissue sample 22 is embedded in a porous em-

bedding media 28 in a desired orientation, processed, and sectioned all while being held in the porous embedding media. The post-tissue processing step of manual embedding in paraffin is eliminated from the process.

FIG. 1

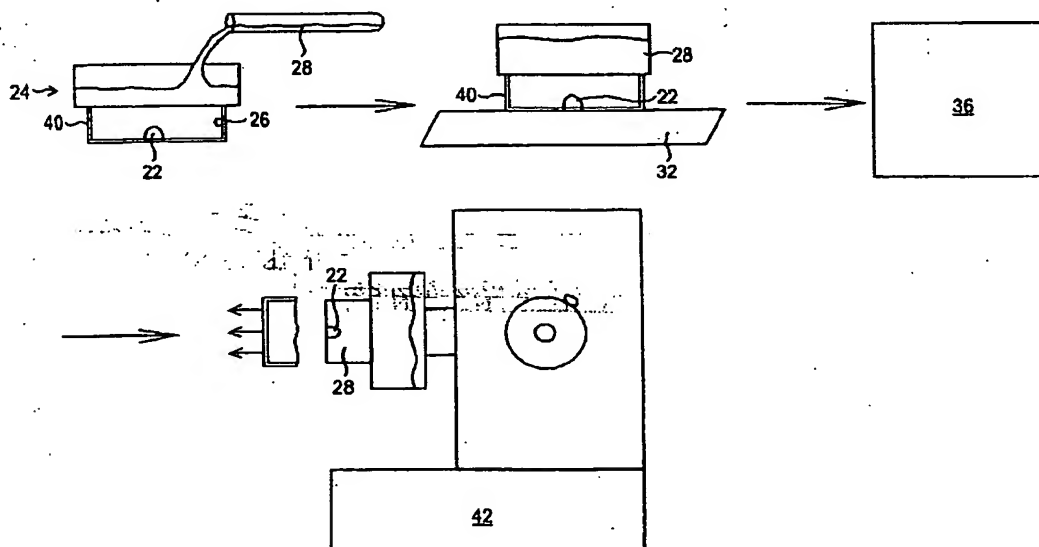

EP 1 321 757 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 02 8076

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 142 575 A (GISE HARDO DR. FREIHERR VON) 29 May 1985 (1985-05-29)	1-3	G01N1/36
Y	* page 3 *	6-10	G01N1/30
	* figure 1 *		

X	US 3 411 185 A (PICKETT JOHN E P) 19 November 1968 (1968-11-19)	1-3	
Y	* column 3 - column 5 *	6-10	
	* figures 1,8 *		

X,D	US 4 801 553 A (NORTH JOHN R ET AL) 31 January 1989 (1989-01-31)	1-3	
Y	* column 3 - column 6 *	6-10	
	* figure 1 *		

X	ANONYMOUS: "Tissue Embedding Unit" ALABAMA RESEARCH AND DEVELOPMENT PRODUCT CATALOGUE, [Online] January 2001 (2001-01), XP002273887 Retrieved from the Internet: <URL:www.alspi.com/embed.htm> [retrieved on 2004-03-17] * the whole document *	4,5	

A	US 4 577 903 A (WELLS CAROL L) 25 March 1986 (1986-03-25)	1-10	
	* the whole document *		

A	US 3 982 862 A (KINNEY THOMAS D ET AL) 28 September 1976 (1976-09-28)	1-10	
	* the whole document *		

The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 18 March 2004	Examiner Timonen, T
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02.2004)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 8976

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-03-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0142575	A	29-05-1985	EP 0142575 A1	29-05-1985
US 3411185	A	19-11-1968	NONE	
US 4801553	A	31-01-1989	GB 2189596 A	28-10-1987
			DE 3779178 D1	25-06-1992
			EP 0245969 A2	19-11-1987
US 4577903	A	25-03-1986	NONE	
US 3982862	A	28-09-1976	CA 1049972 A1	06-03-1979
			DE 2613932 A1	21-10-1976
			GB 1483574 A	24-08-1977
			JP 51123198 A	27-10-1976

11/17/17

11/17/17
11/17/17
11/17/17

11/17/17

11/17/17

11/17/17

THIS PAGE BLANK (USPTO)